

Flexi-Fence

Africa Pattern

Horizontal line wire spacing 100mm (4in), unless otherwise indicated.

- Spacing between vertical stay wires - 305mm (12")
- Spacing between vertical stay wires - 152mm (6")

Specifications:

Horizontal line wires:
2,00mm dia. high tensile steel wire - 415kg breaking strain.

Vertical stay wires:

2,00mm dia. mild steel wire - 220kg breaking strain



**Ringlock / Flexi
Range
Brochure 2014**

BONNOX "Flexi Fence" (Africa Pattern)

Ringlock Construction - Ideal for undulating terrain

Fully galvanised, for longer life. Available in 100m rolls

Code	No. of horizontal line wires	Height m	Weight kg	Main Application
------	------------------------------	----------	-----------	------------------

Spacing between vertical stay wires - 305mm (12")

1558/12	15	1,47	
1770/12	17	1,78	61.9
1982/12	19	2,08	69.9

Uneven Terrain
 up to 45 degrees

Flower Growers Roof Mesh - 305mm (12") vertical spacing

(Special orders only)

882/12	8	2,08	38.6
--------	---	------	------

Greenhouse Roofs

Specifications:


Horizontal line wires -
 Vertical stay wires -

2,00mm dia. high tensile steel wire - 415kg breaking strain.
 2,00mm dia. mild steel wire - 220kg breakong strain

BONNOX "Flexi-Fence" (Africa Pattern)

Horizontal line wire spacing 100mm(4in), unless otherwise indicated

Vertical stay wire spacing 300mm(12in)

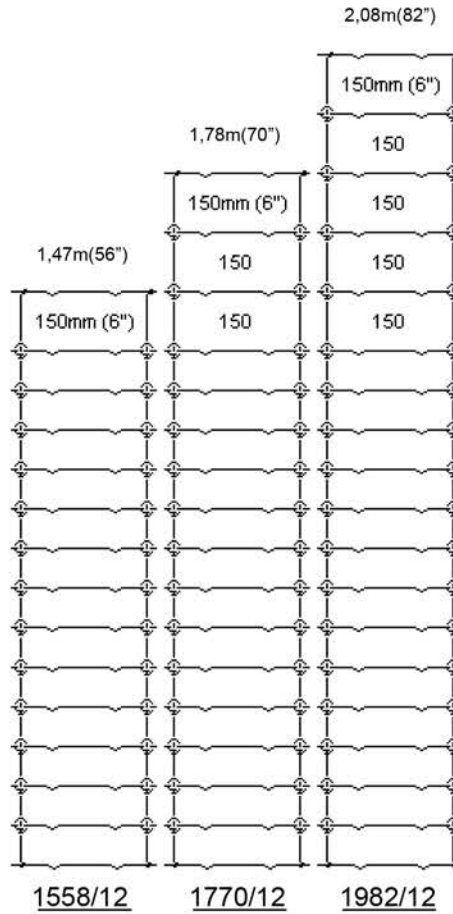

Product Code